



RIGHT SIDE VIEW

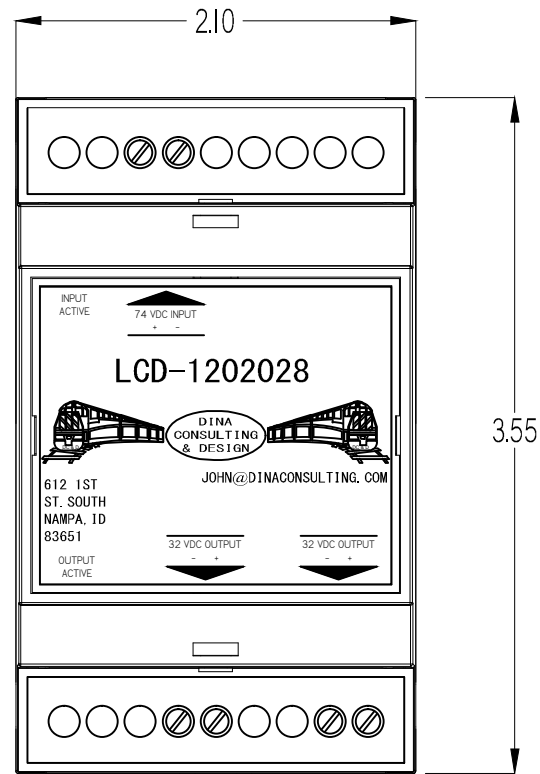

FRONT VIEW

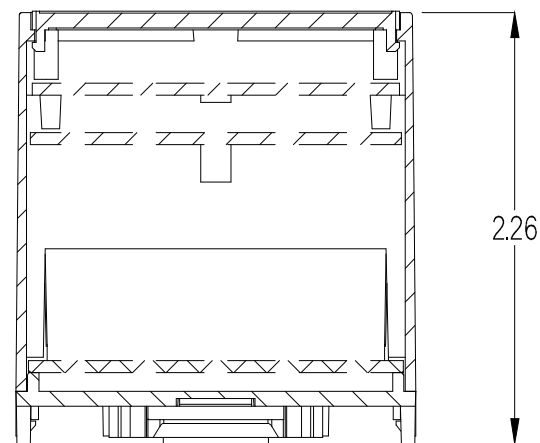

BOTTOM VIEW

CONTACT INFO:

SALES REP: JOHN DINA
 PH: 1-208-440-1877
 EMAIL: JOHN@DINACONSULTING.COM

P/N: LCD-1202028
 UOM: EA



DESIGNED TO EXCEED EMC REQUIREMENTS IEC 60571

2 YEAR WARRANTY

INPUT Power
 Voltage range: 28 VDC - 90 VDC
 Current: 185 W @ 74 VDC

OUTPUT POWER
 Voltage Output: 32 VDC
 Current: 5 AMP
 Efficiency: 88%

Environmental
 Operational Temp: -30 C to +85 C
 Storage Temp: -40 C to +100 C

-	INITIAL RELEASE	REVISED BY	J. MANGEAC
		CHECKED BY	DCD
		RELEASED BY	J. DINA
REV	DESCRIPTION	DATE	05/17/13
REVISION HISTORY			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		 DC & D DINA CONSULTING & DESIGN 612 1ST SOUTH NAMPA IDAHO 83651	
DECIMALS	FRACTIONS		
X = ±.2	XX = ±1/4	DESCRIPTION POWER CONDITIONER 74/32 VDC 5A - 8A PEAK	
.XX = ±.06	ANGLES		
XXX = ±.010	X = ±1°	DWG SIZE: B DRAWING NUMBER: LCD-1202028	
	XX = ±0.5°		
DO NOT SCALE DRAWING		FIRST USED	-
THIRD ANGLE PROJECTION		MODEL FILE	
		DRAFT FILE	
		LAST SAVED	
		SCALE: 1:1	WEIGHT: 0.53LBS
		SHEET	01 OF 01