



RIGHT SIDE VIEW

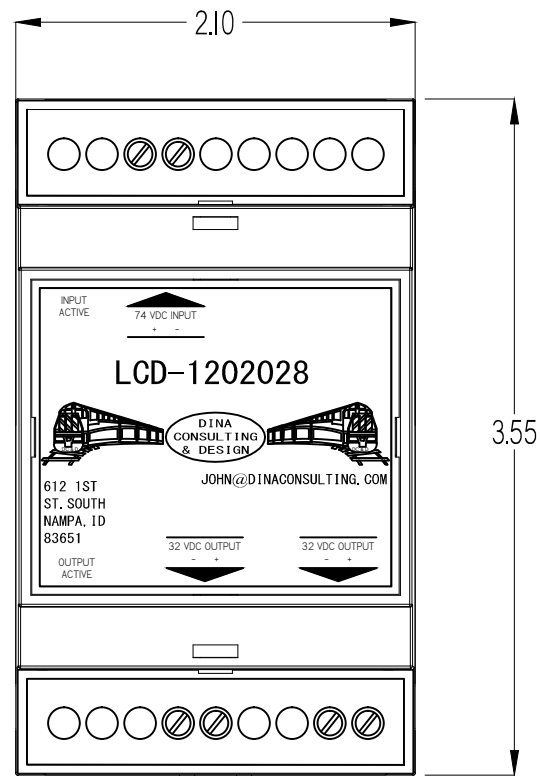

FRONT VIEW

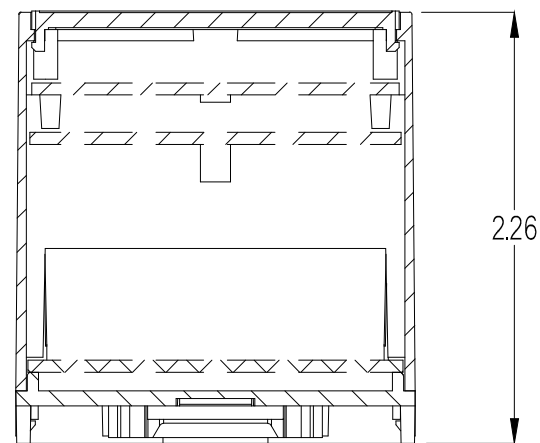

BOTTOM VIEW

VENDOR: DINA CONSULTING
612 ST SOUTH
NAMPA IDAHO 83651

P/N: LCD-1202028
UOM: EA

DESIGNED TO EXCEED EMC REQUIREMENTS IEC
60571

2 YEAR WARRANTY



SALES REP: JOHN DINA
PH: 1-208-440-1877
EMAIL: JOHN@DINACONSULTING.COM

INPUT Power
Voltage range: 28 VDC - 90 VDC
Current: 160W

OUTPUT POWER
Voltage Output: 32 VDC
Current: 5 AMP
Efficiency: 88%

Environmental
Operational Temp: -40 C to +85 C
Storage Temp: -50 C to +100 C

REV	DESCRIPTION	DATE	REVISION HISTORY
-	INITIAL RELEASE	05/17/13	J. MANGEAC DCD J. DINA
			REVISIED BY CHECKED BY RELEASED BY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS X = ±.2 .XX = ±.06 .XXX = ±.010 FRACTIONS X/X = ±1/4 ANGLES X = ±1° XX = ±0.5°	APPROVALS		 DC & D DINA CONSULTING & DESIGN 612 1ST SOUTH DINACONSULTING.COM 208-936-3300
	DRAWN: JOMANGEAC	05/17/13	
	CHECKED: DC&D	05/17/13	
	ENGINEER: JDINA	05/17/13	
DO NOT SCALE DRAWING	FIRST USED: -	DESCRIPTION: POWER CONDITIONER	
THIRD ANGLE PROJECTION	MODEL FILE	74/32 VDC 5A	
	DRAFT FILE	DWG SIZE: B	DRAWING NUMBER: LCD-1202028
	LAST SAVED	SCALE: 1:1	WEIGHT: 0.53LBS
		SHEET 01 OF 01	REV -